


# **DUALSLIM CAT.6A SHIELDED RJ45** FEEDTHROUGH CONNECTOR

Can be front or rear mounted in the panel

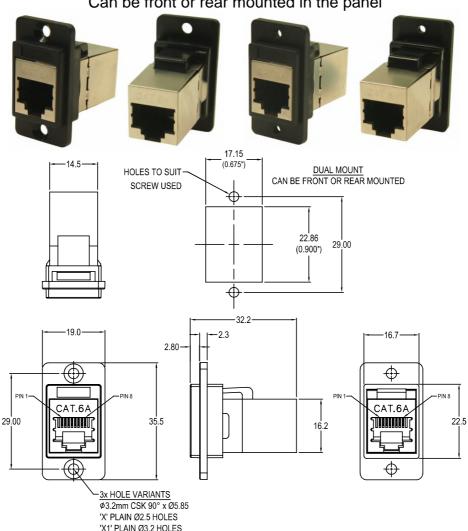

### **VARIANTS**

Part No. **CP30725S** 

DUALSLIM Cat.6A Shielded RJ45 Black plastic frame, CSK holes

DUALSLIM Cat.6A Shielded RJ45 Black plastic frame, Ø2.5 PLAIN holes CP30725SX CP30725SX1 DUALSLIM Cat.6A Shielded RJ45 Black plastic frame, Ø3.2 PLAIN holes

#### Feedthrough Features

- Fits standard rectangular cutout.
- Front or rear mounting through the panel.
- Various hole mounting options.
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile.

#### General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

## Material:

1.RJ45 In-Line Coupler:

PC/ABS, UL 94V-0, Black colour

2.RJ45 In-Line Coupler Contact:

Phosphor Bronze, 3-50 micro inches gold plating over nickel plate.

3.PCB: FR4, UL 94V-0

4. Plastic Frame: Polyamide UL94 V-2 Performance:

- 1.T568A & T568B wiring.
- 2.Meet ISO/IEC 11801 and EN50173
- 3.Meet ANSI/TIA/EIA 568B.2
- 4. Operating temperature: Min -10°C Max +70°C

For further information, contact sales@cliffuk.co.uk

# **Cliff Electronic Components Limited**,

76 Holmethorpe Avenue, Holmethorpe Ind. Estate. Redhill, Surrey RH1 2PF U.K.

Tel: +44 (0)1737 771375 Fax: +44 (0)1737 766012







© CLIFF 11/2020 ISS.1